


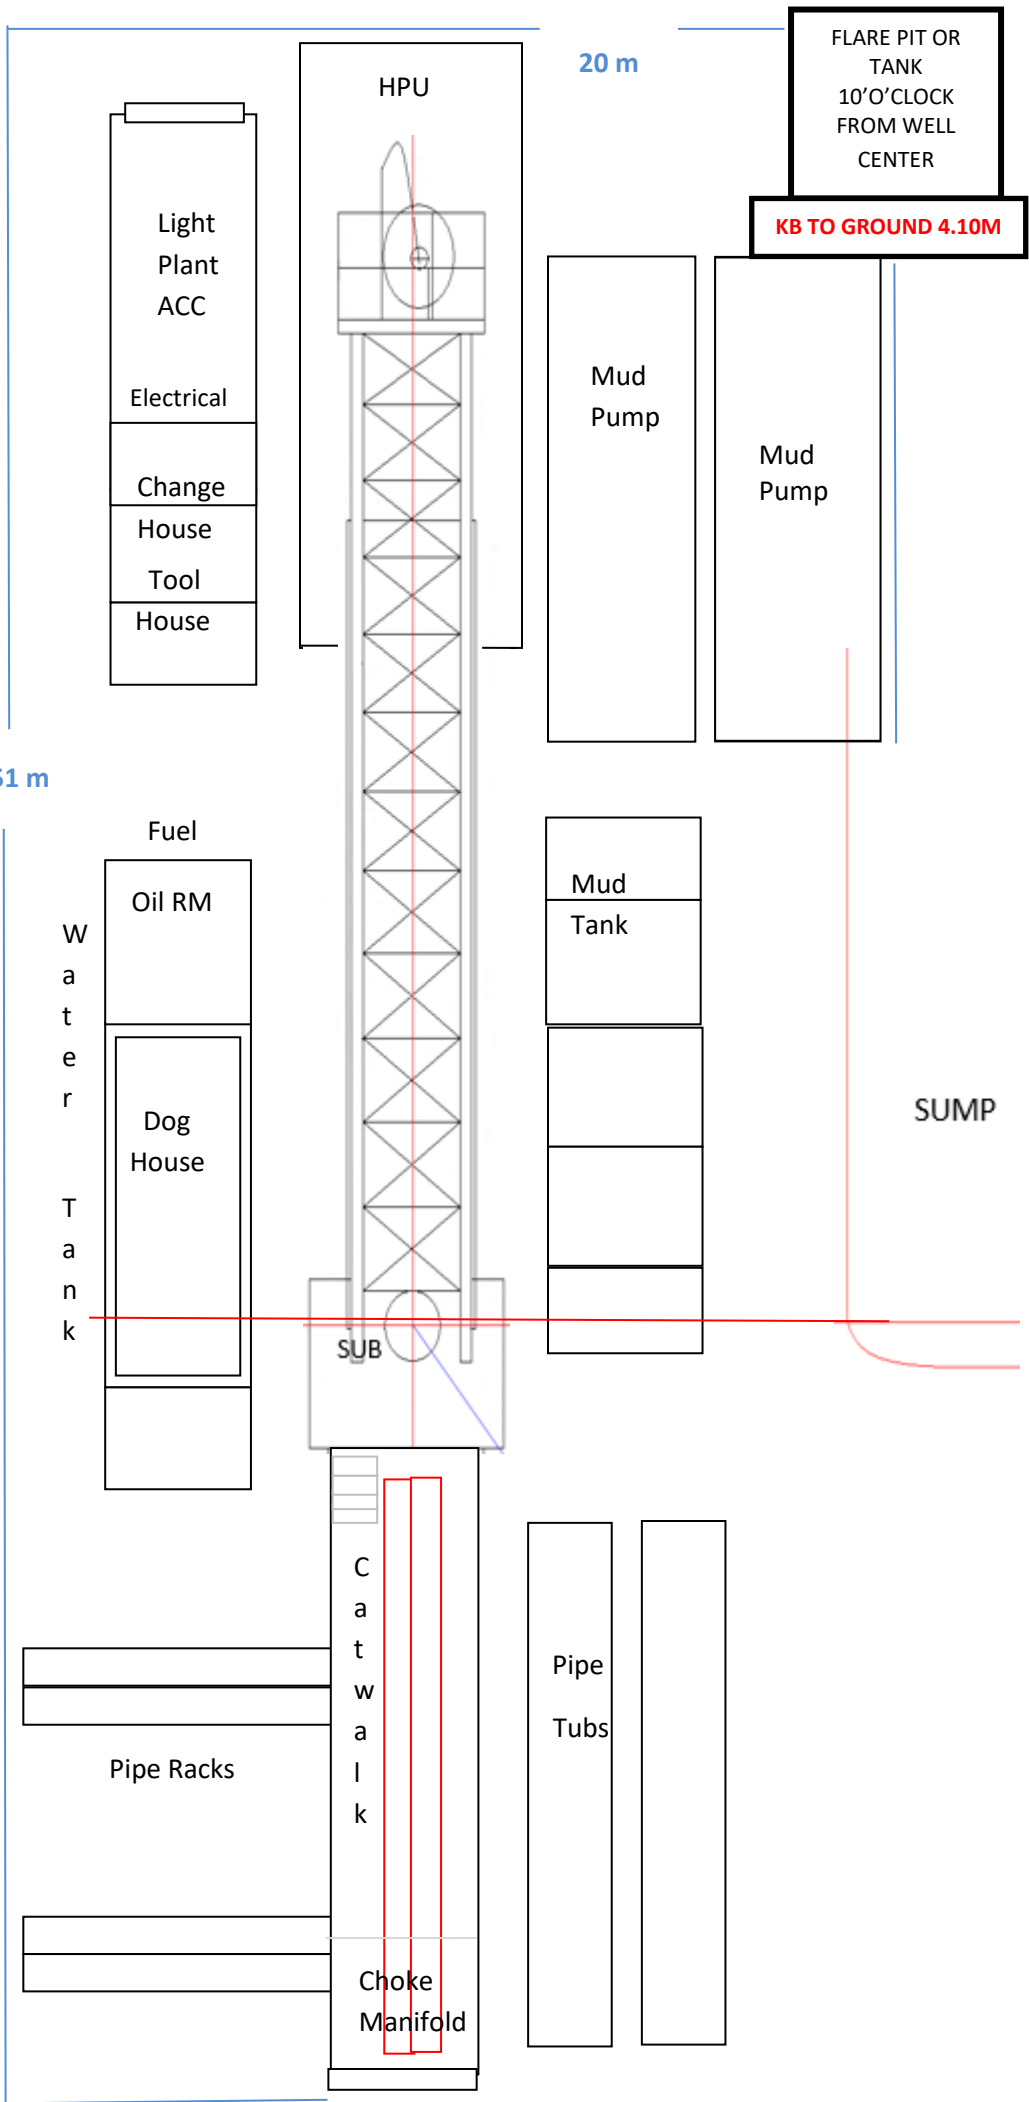

- DRAWWORKS**
- Corsair 400w/1020mm w/1020 MM
 - Kobelt Brake
 - Caterpillar 3406 w/ 5 speed Allison transmission
 - Width 3.8M
 - Length 9.8M
 - Front 21,000KG
 - Back 41,000 KG
- MAST**
- Steelhead 72' (22M) (110,000 daN) Capacity
- SUBSTRUCTURE**
- Trailer Mount w/ '12 Height "High-back" working floor and hydraulic leveling system 3.6 x 19.3
- MUD PUMP**
- Emsco F1000- triplex 61/2" (254mm) stroke w/ caterpillar C27 1,050 hp x2
 - Width 3.8M
 - Length 12.25M
 - Height 3.16M
 - 39,000 KG
- HPU** - W -3.1 x L-9.3 x H-2.8
- MUD TANK**
- 107.4m3 Shaker x2(KING COBRA)
 - Width 3.51M
 - Length 16.75M
 - Height 3.82M
 - 35,000 KG
- LIGHT PLANT**
- 350 KW w/ 280 volt and 480 volt, 3406 Caterpillar compatible for centrifuge
 - Width 3.65M
 - Length 11.27M
 - Height 2.9M
 - 24,490KG
- BLOW OUT PREVENTORS (CLASS #3)**
- 2x8' (9"bore), 3000psi (203 mm, 21000 kPa) Shaffer LWP single gates
 - 1x8", 3000 psi (203mm, 21000 kPa) Shaffer Spherical
- LOADER**
- ROTARY TABLE**
- 18" (457 mm) Howard Turner
- CHOKE MANIFOLD**
- 76mm X 21,000 kPa
- ACCUMULATOR**
- Air Hydraulic w/nitrogen back up single pump
- BOILER**
- 80 H.P. Volcano
 - Width 3.39M
 - Length 9.93M
 - Height 3.06M
 - 28,150KG
- DRILL PIPE (4" on all rigs) (GRADE DS40)**
- Available Pipe:
- 4"-102mm-4" FH connections
 - 4" hevi-wate - 102mm 4"FH-DS40
 - 15- 5" - 127mm w/ 3 ½ IF Connections
 - 6 ¼ - 159mm w/ 4 ½ H90 Connections
- HYDRAULIC PIPE TUBS**
- Two (2)
 - Width 2.7M
 - Length 12.10M
 - Height 1.2M
- WATER TANK**
- Width 3.40M
 - Length 12.78M
 - Height 3.8M
 - 39,160 KG
- HYDRAULIC SKATE CAT WALK**
- Width 2.74M
 - Length 18.36M
 - Height 3.0M
 - 20,180KG
- AUXILIARY EQUIPMENT**
- Pason EDR
- FUEL CAPACITY**
- 11 602 Liters
 - CAODC Inventory #1389
- PUSH SHACK** - 3.6 x 17.5 x 3.1
- PULL DOWN SYSTEM**
- 20,000 lbs/ 10,000 daN

RIG #3TD TOP DRIVE RANGE III FDS 150 TON
HPU UNIT C11 420HP
Capacity (M) 3000M
WINTER LOADS: 15
SUMMER LOADS: 14